


PC3G15 - PC3G25

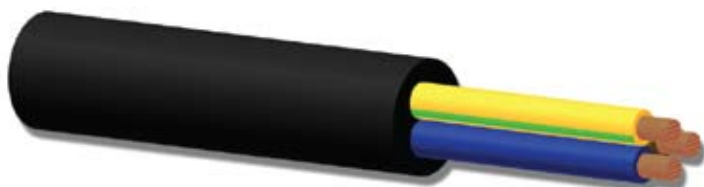

POWER CORDS

The PC3G15 and PC3G25 are high quality standard H05VV-F power cables for indoor and outdoor, fixed or mobile use. The cables are made of 3 PVC insulated conductors, with a diameter of 3 mm each (PC3G15) or 3,5 mm each (PC3G25) .

These cables can be used in damp spaces.

Packed in a highly flexible PVC outer jacket of 8 mm resp. 9 mm.

This offers you a cable that can be used in a wide variety of applications

GENERAL SPECIFICATIONS

Model of cable	PC3G15	PC3G25
Type of cable	Power cable	Power cable
inner conductor	3 pcs. BC 48 X 0.2 mm	3 pcs. BC 80 X 0.2 mm
Section inner conductor	3 x 1.5 mm ²	3 x 2.5 mm ²
Inner conductor colour	Green & yellow/blue/brown	Green & yellow/blue/brown
Outer jacket	flexible PVC	flexible PVC
Outer jacket colour	Black	Black
Outer jacket diameter	Ø 8 mm	Ø 9 mm
Type of packing	Wooden reel for 100 meter	Wooden reel for 100 meter
Lead Resistance	1.20 Ohm - 100 meter	0.66 Ohm - 100 meter
Max. operation voltage	450V	450V
Max. current	16 Amp.	20 Amp.
Approval	CE - VDE	CE - VDE

MECHANICAL SPECIFICATIONS

	PC3G15	PC3G25
Temperature range by fixed installation	-40° C to +80° C	-40° C to +80° C
by flexible installation	-25° C to +60° C	-25° C to +60° C
Bending radius by fixed installation	8 x outerdiameter	6x outerdiameter
by flexible installation	10 x outerdiameter	8 x outerdiameter